



บริษัท เอดีดี เฟอร์เนส จำกัด
ADD FURNACE CO.,LTD.

44 ซอยบรมราชชนนี 70 ถนนบรมราชชนนี แขวงศาลาธรรมสพน์ เขตทวีวัฒนา กรุงเทพฯ 10170
โทร: 02-888-3472 โทร: ออกแบบ: 08-08-170-170 แฟกซ์: 02-888-3258
<https://www.add-furnace.com> E-mail: sales@add-furnace.com

WFS6000.

Water Flow Switch

APPLICATION

The paddle type SPOT WFS series are designed to provide excellent performance where accuracy, reliability, and rugged construction are required used in liquid flow lines carrying water or any fluid neither harmful to brass and phosphor bronze nor classified as a hazardous fluids.

They can be wired to close one circuit and open a second circuit when liquid flow either exceeds or drops below the adjusted flow rate.

The WFS series are recommended for liquid pressure and temperature as mentioned below and must not be used on lines carrying liquids below 0°C.

These series may be used on liquids with high salt or chlorine content but is not for use in hazardous atmospheres. They may be also used outdoors but must be protected from weather or splashing water.

All series WFS flow switches are designed for use only as operating controls. Where an operating control failure would result in personal injury and/or loss of property, it is the responsibility of user to add safety devices that protect against, or supervisory systems that warn of control failure.

MODEL: WFS6000.



TECHNICAL SPECIFICATIONS


Operating Pressure	10kgf/cm ² (1 MPa)
Withstand Pressure	17.5Kgf/cm ² (1.75 MPa)
Insulation Resistance	Over 100 ohm DC 500V
Withstand Voltage	AC 1500V / 1 minute
Contact Point Life	1000K Cycle
Bellow Life	500K Cycle
Temperature of Fluid	Max 100°C (212°F)

ELECTRICAL RATINGS


TYPE	VOLTAGE	RESISTANCE LOAD	LAMP LOAD	MOTOR LOAD
AC (Standard)	AC 125 V AC 250 V	5A 2.5A	44A 22A	5A 2.5A
DC	DC 115 V DC 230 V	0.3A 0.15A	-	-

Honeywell

TYPICAL INSTALLATION

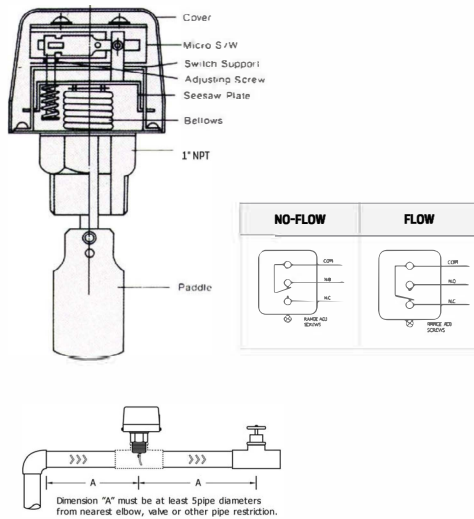

DIMENSIONS

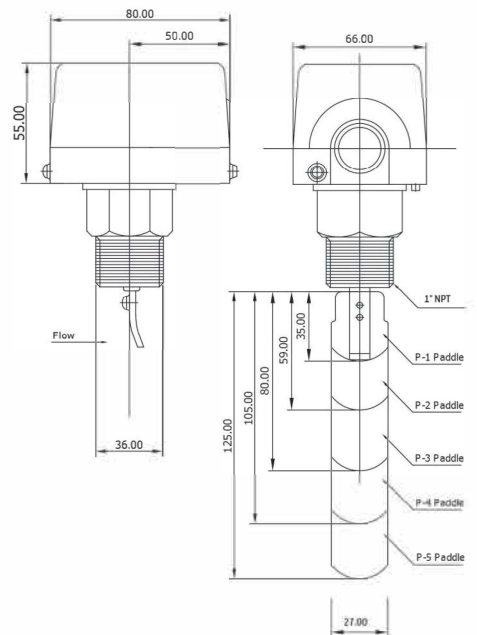

All dimensions are in mm

FLOW CONTROL RANGE

Pipe Diameter (inch)	Paddle	Minimum - LPM (GPM)		Maximum - LPM (GPM)	
		On-Flow	Off-Flow	On-Flow	Off-Flow
1	1	15 (4.0)	8 (2.0)	45 (12.0)	41 (11.0)
1-1/4	1	26 (6.9)	13 (3.4)	75 (20.0)	68 (18.0)
1-1/2	1	29 (7.0)	20 (5.3)	105 (28.0)	94 (25.0)
2	2	34 (9.0)	17 (4.5)	120 (32.0)	105 (28.0)
2-1/2	2	60 (16.0)	34 (9.0)	210 (55.0)	188 (50.0)
3	3	68 (18.0)	30 (8.0)	288 (76.0)	275 (73.0)
4	3	128 (34.0)	64 (17.0)	412 (109.0)	360 (95.0)
5	3	225 (59.0)	113 (30.0)	750 (198.0)	652 (172.0)
6	3	345 (91.0)	172 (45.0)	1125 (297.0)	975 (258.0)

This table illustrates the flow control range obtained from experimental data. A variation of up to 10% can be expected, depending on operating conditions. Final adjustments should be made on site using a flow meter.

For more information,
<https://honeywellbuildings.in>
 Call: 1-800-103-0339
 Email: BuildingAutomation.BMSIndia@Honeywell.Com

Honeywell Building Automation
 Unitech Trade Center, 5th Floor, Sector-43,
 Block C, Sushant Lok Phase - I,
 Gurgaon - 122 002

www.honeywell.com

Honeywell