



บริษัท เอดีดี เฟอร์เนส จำกัด

ADD FURNACE CO.,LTD.

44 ซอยบรมราชชนนี 70 ถนนบรมราชชนนี แขวงศาลาธรรมสพน์ เขตทวีวัฒนา กรุงเทพฯ 10170

โทร: 02-888-3472 โทร: ออกแบบ: 08-08-170-170 แฟกซ์: 02-888-3258

<https://www.add-furnace.com> E-mail: sales@add-furnace.com



60W Ultra Slim Step Shape DIN Rail

HDR-60 series



■ Features

- Ultra slim design with 52.5mm(3SU) width
- Universal input 85~264VAC(277VAC operational)
- No load power consumption<0.3W
- Isolation class II
- Pass LPS (Limited power source)
- DC output voltage adjustable
- Protections : Short circuit / Overload / Over voltage
- Cooling by free air convection (working temperature:-30~+70°C)
- DIN rail TS-35/7.5 or 15 mountable
- LED indicator for power on
- 3 years warranty

■ Applications

- Household control system
- Building automation
- Industrial control system
- Factory automation
- Electro-mechanical apparatus

■ GTIN CODE


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

HDR-60 is one economical ultra slim 60W DIN rail power supply series, adapt to be installed on TS-35/7.5 or TS-35/15 mounting rails. The body is designed 52.5mm(3SU) in width, which allows space saving inside the cabinets. The entire series adopts the full range AC input from 85VAC to 264VAC (277VAC operational) and conforms to BS EN/EN61000-3-2, the norm the European Union regulates for harmonic current.

HDR-60 is designed with plastic housing that it can effectively prevent user from electric hazards. With working efficiency up to 91%, the entire series can operate at the ambient temperature between -30°C and 70°C under air convection. The complete protection functions and relevant certificates for home automations and industrial control apparatus (IEC62368-1,UL508,UL62368-1,BS EN/EN61558-2-16) make HDR-60 a very competitive power supply solution for household and industrial applications.

■ Model Encoding

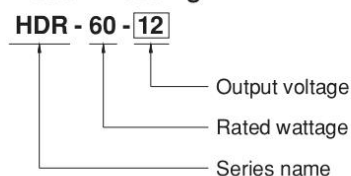



บริษัท เอดีดี เฟอร์เนส จำกัด

ADD FURNACE CO.,LTD.

44 ซอยบรมราชชนนี 70 ถนนบรมราชชนนี แขวงศาลาธรรมสพน์ เขตทวีวัฒนา กรุงเทพฯ 10170

โทร: 02-888-3472 โทร: ออกแบบ: 08-08-170-170 แฟกซ์: 02-888-3258

https://www.add-furnace.com E-mail: sales@add-furnace.com



60W Ultra Slim Step Shape DIN Rail

HDR-60 series

SPECIFICATION

MODEL	HDR-60-5		HDR-60-12		HDR-60-15		HDR-60-24		HDR-60-48				
OUTPUT	DC VOLTAGE	5V		12V		15V		24V		48V			
	RATED CURRENT	6.5A		4.5A		4A		2.5A		1.25A			
	CURRENT RANGE	0 ~ 6.5A		0 ~ 4.5A		0 ~ 4A		0 ~ 2.5A		0 ~ 1.25A			
	RATED POWER	32.5W		54W		60W		60W		60W			
	RIPPLE & NOISE (max.) Note.2	80mVp-p		120mVp-p		120mVp-p		150mVp-p		240mVp-p			
	VOLTAGE ADJ. RANGE	5.0 ~ 5.5V		10.8 ~ 13.8V		13.5 ~ 18V		21.6 ~ 29V		43.2 ~ 55.2V			
	VOLTAGE TOLERANCE Note.3	±2.0%		±1.0%		±1.0%		±1.0%		±1.0%			
	LINE REGULATION	±1.0%		±1.0%		±1.0%		±1.0%		±1.0%			
	LOAD REGULATION	±1.0%		±1.0%		±1.0%		±1.0%		±1.0%			
	SETUP, RISE TIME	500ms, 50ms/230VAC		500ms, 50ms/115VAC		at full load							
HOLD UP TIME (Typ.)	30ms/230VAC		12ms/115VAC		at full load								
INPUT	VOLTAGE RANGE	85 ~ 264VAC (277VAC operational)		120 ~ 370VDC (390VDC operational)									
	FREQUENCY RANGE	47 ~ 63Hz											
	EFFICIENCY (Typ.)	85%		88%		89%		90%		91%			
	AC CURRENT (Typ.)	1.2A/115VAC		0.8A/230VAC									
INRUSH CURRENT (Typ.)	COLD START 30A/115VAC 60A/230VAC												
PROTECTION	OVERLOAD	105 ~ 160% rated output power Hiccup mode when output voltage <50%, recovers automatically after fault condition is removed Constant current limiting within 50% ~ 100% rated output voltage, recovers automatically after fault condition is removed											
	OVER VOLTAGE	5.75 ~ 6.75V		14.2 ~ 16.2V		18.8 ~ 22.5V		30 ~ 36V		56.5 ~ 64.8V			
		Protection type : Shut down o/p voltage, re-power on to recover											
ENVIRONMENT	WORKING TEMP.	-30 ~ +70°C (Refer to "Derating Curve")											
	WORKING HUMIDITY	20 ~ 90% RH non-condensing											
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH non-condensing											
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C) RH non-condensing											
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6											
	OPERATING ALTITUDE	2000 meters											
OVER VOLTAGE CATEGORY	III ; According to EN61558, EN50178, EN60664-1, EN62477-1 ; altitude up to 2000 meters												
SAFETY STANDARDS	UL62368-1, UL508, TUV BS EN/EN61558-2-16, BS EN/EN61558-1, IEC62368-1, EAC TP TC 004, BSMI CNS15598-1, BIS IS13252(Part1): 2010/IEC 60950-1:2005(NOTE 6) approved; Design refer to BS EN/EN62368-1												
WITHSTAND VOLTAGE	I/P-O/P:4KVAC												
ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH												
SAFETY & EMC (Note 4)	EMC EMISSION	Parameter	Standard				Test Level / Note						
		Conducted	BS EN/EN55032(CISPR32), CNS15936				Class B						
		Radiated	BS EN/EN55032(CISPR32), CNS15936				Class B						
		Harmonic Current	BS EN/EN61000-3-2				Class A						
		Voltage Flicker	BS EN/EN61000-3-3				-----						
	EMC IMMUNITY	BS EN/EN55035, BS EN/EN61000-6-2, BS EN/EN61204-3											
		Parameter	Standard				Test Level /Note						
		ESD	BS EN/EN61000-4-2				Level 3, 8KV air; Level 2, 4KV contact, criteria A						
		Radiated Susceptibility	BS EN/EN61000-4-3				Level 3, criteria A						
		EFT/Burest	BS EN/EN61000-4-4				Level 3, criteria A						
		Surge	BS EN/EN61000-4-5				Level 4, 2KV/L-N, criteria A						
		Conducted	BS EN/EN61000-4-6				Level 3, criteria A						
		Magnetic Field	BS EN/EN61000-4-8				Level 4, criteria A						
		Voltage Dips and interruptions	BS EN/EN61000-4-11				>95% dip 0. 5 periods, 30% dip 25 periods, >95% interruptions 250 periods						
		OTHERS	MTBF	3524.8K hrs min. Telcordia SR-332 (Bellcore) ; 927.6K hrs min. MIL-HDBK-217F (25°C)									
			DIMENSION	52.5*90*54.5mm (W*H*D)									
PACKING	190g/60pcs/13Kg/0.91CUFT												
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.												
	2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μ F & 47 μ F parallel capacitor.												
	3. Tolerance : includes set up tolerance, line regulation and load regulation.												
	4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf)												
	5. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).												
	6. Some model may not have the BIS logo, please contact your MEAN WELL sales for more information.												
※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx													



บริษัท เอดีดี เฟอร์เนส จำกัด

ADD FURNACE CO.,LTD.

44 ซอยบรมราชชนนี 70 ถนนบรมราชชนนี แขวงศาลาธรรมสพน์ เขตทวีวัฒนา กรุงเทพฯ 10170

โทร: 02-888-3472 โทร: ออกแบบ: 08-08-170-170 แฟกซ์: 02-888-3258


<https://www.add-furnace.com> E-mail: sales@add-furnace.com




60W Ultra Slim Step Shape DIN Rail

HDR-60 series


■ Block Diagram

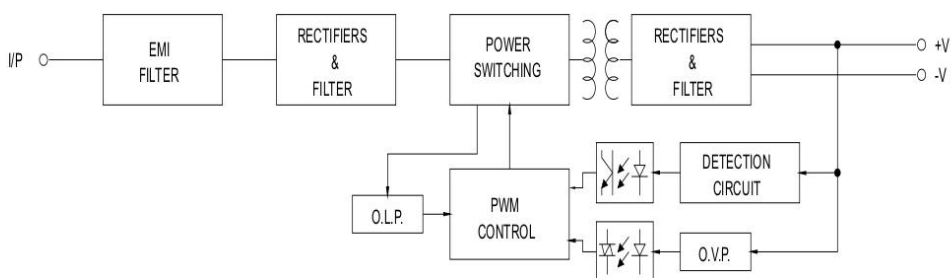

■ Derating Curve

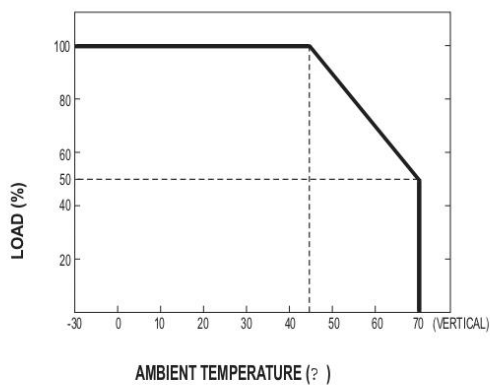

■ Output Derating VS Input Voltage

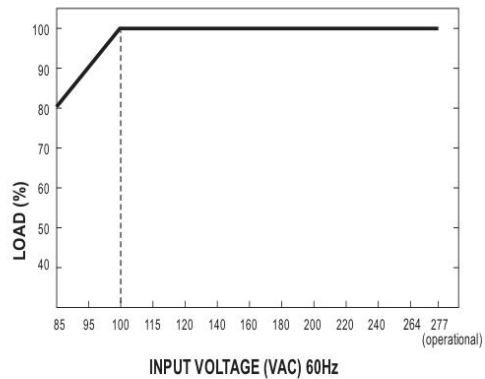



บริษัท เอดีดี เฟอร์เนส จำกัด

ADD FURNACE CO.,LTD.

44 ซอยบรมราชชนนี 70 ถนนบรมราชชนนี แขวงศาลาธรรมสพน์ เขตทวีวัฒนา กรุงเทพฯ 10170

โทร: 02-888-3472 โทร: ออกแบบ: 08-08-170-170 แฟกซ์: 02-888-3258

<https://www.add-furnace.com> E-mail: sales@add-furnace.com




60W Ultra Slim Step Shape DIN Rail

HDR-60 series

■ Mechanical Specification

(Unit: mm , tolerance $\pm 0.5\text{mm}$)

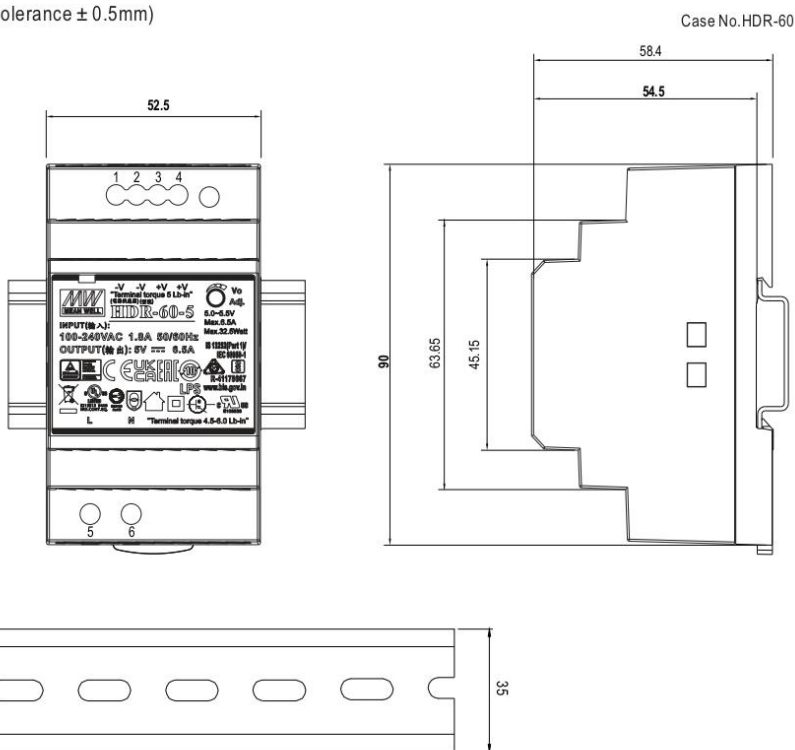

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15

Terminal Pin No. Assignment

Pin No.	Assignment	Pin No.	Assignment
1,2	-V	5	AC/L
3,4	+V	6	AC/N

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>