

Solenoid valves for gas GSV



- Safety shut-off valves for gas
- Suitable for a max. inlet pressure of 500 mbar (500 hPa/7 psig)
- Easy installation into a system
- Compact design saves space
- No extra valve required owing to integrated flow adjustment
- Check indication by blue LED
- Proof of closure switch with integral visual position indicator
- Suitable for high-duty cycling




Replacement possibilities

Solenoid valve for gas VG is to be replaced by GSV.

Type code GSV 1 – 2


Code	Description
GSV	Gas solenoid valve
1 – 2	Size
T	T-product
10, 15, 20, 25, 32, 40, 50, 65	Nominal inlet and outlet diameter
R	Rp internal thread
N	valve quick opening, quick closing
L	valve slow opening, quick closing
K	Mains voltage 24 V DC
Q	Mains voltage 120 V AC; 50/60 Hz
W	Mains voltage 230 V AC; 50/60 H

Dimensions

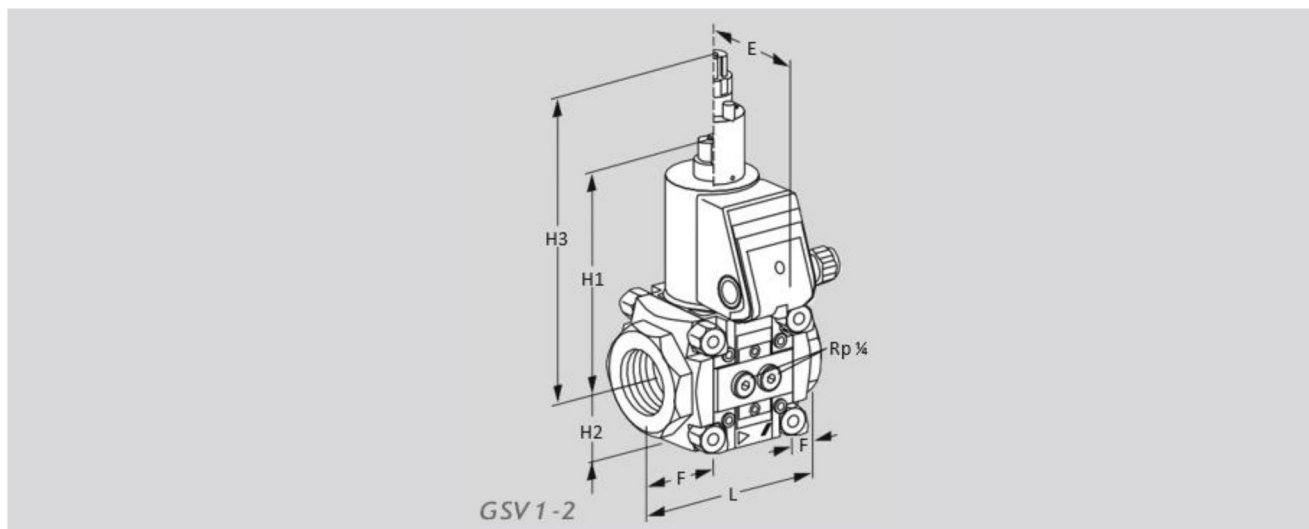

VAS 1 – 2 with Rp internal thread [mm]

Type	Connection		Dimensions									Weight kg
	Rp	DN	L mm	E mm	F mm	G mm	H1 mm	H2 mm	H3 mm	H4 mm	H5 mm	
GSV 115	1/2	15	75	75	15	67.3	143	32	208	161	226	1.4
GSV 120	3/4	20	91	75	23	67.3	143	32	208	161	226	1.5
GSV 125	1	25	91	75	23	67.3	143	32	208	161	226	1.4
GSV 240	1.1/2	40	127	85	29	98.2	170	47	235	191	256	3.8
GSV 250	2	50	127	85	29	98.2	170	47	235	191	256	3.6

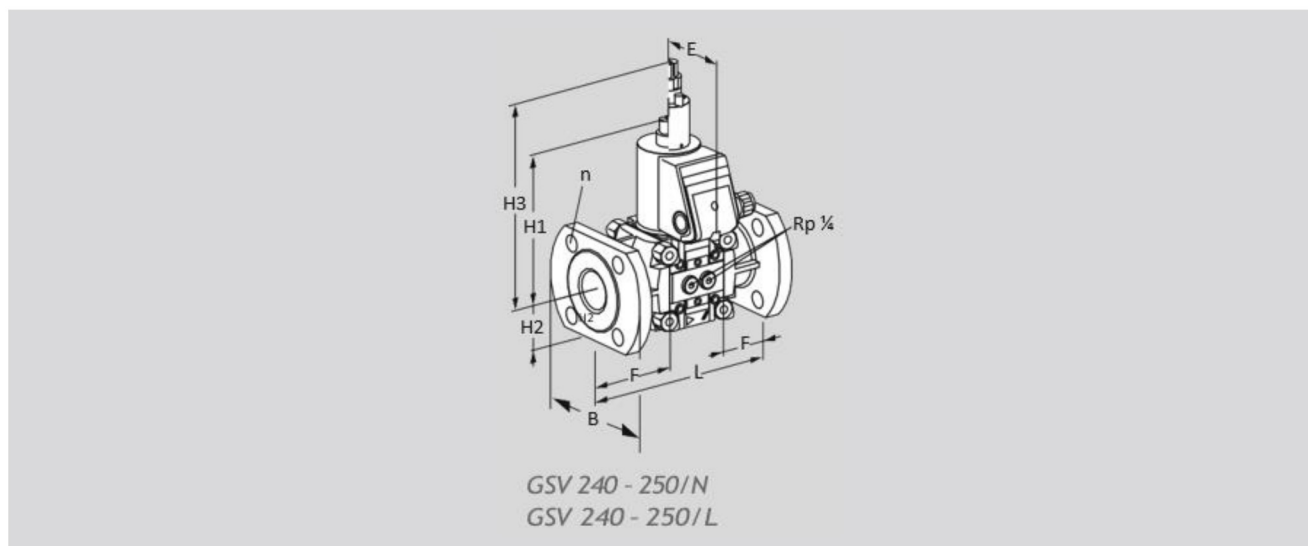

GSV 2 with ISO flange [mm]

Type	Connection	Dimensions											Weight
		L	E	F	G	B	n	H1	H2	H3	H4	H5	
	DN	mm	mm	mm	mm	mm		mm	mm	mm	mm	mm	kg
GSV 240	40	200	85	66	98.2	150	4	175	56	240	196	258	5